

# SLP080-12M

## High Efficiency Polycrystalline PV Module


- Nominal 12V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron, tempered glass.
- Designed to withstand high wind pressures, hail and heavy snow.
- Quality aesthetic appearance.

**36 CELL**  
POLYCRYSTALLINE MODULE

**80W**  
POWER OUTPUT

**20.00%**  
MODULE EFFICIENCY

**5%**  
POSITIVE TOLERANCE

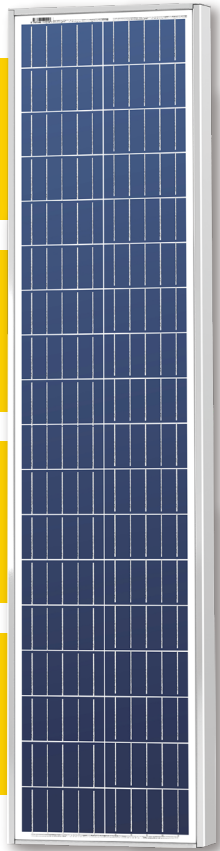

**High Efficiency**

Module Efficiency improved through advanced cell technology and manufacturing capabilities



**High PID Resistance**

Advanced cell technology and qualified materials lead to high resistance to PID




**Withstands Harsh Environment**

High PID resistance  
5400 Pa positive load  
2400 Pa negative load  
Salt mist (IEC 61701)


### Performance Warranty


**10** years  
Product Warranty

**25** years  
Power Warranty

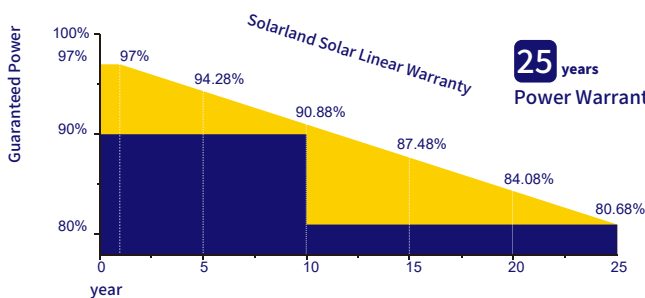

Product Certificate	IEC 61215, IEC 61730
Management Certificate	ISO 9001: 2016
Other certificate	Fire Rating Class C, TÜV Rheinland
Positive mechanical load	>5400Pa
Positive Power Tolerance	0~+5W
Warranty Information	2 Year Product Warranty and Workmanship



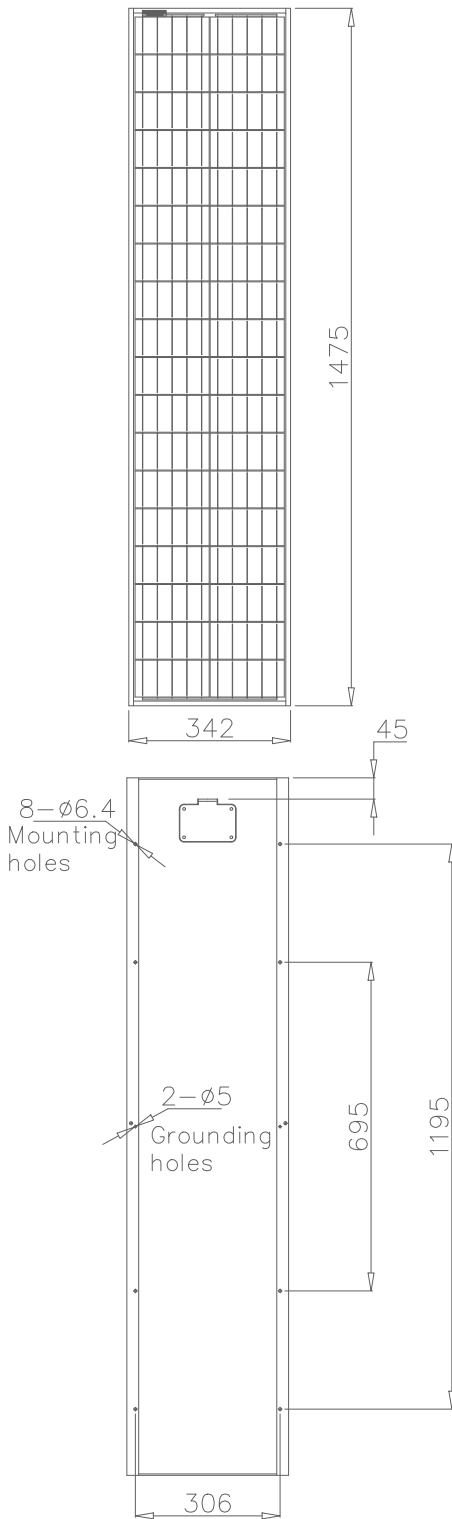


Dimensions in brackets are in inches.  
Un-bracketed dimensions are in millimeters.  
Unit: mm[in.]


Electrical Characteristics	SLP080-12M
Product code	080011218
Maximum power (Pmax)	80W
Voltage at Pmax (Vmp)	17.20V
Current at Pmax (Imp)	4.65A
Open-circuit voltage (Voc)	21.6V
Short-circuit current (Isc)	5.17A
Temperature coefficient of Voc	-(80±10)mV/°C
Temperature coefficient of Isc	(0.065±0.015)%/°C
Temperature coefficient of power	-(0.5±0.05)%/°C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	1000V DC
Power tolerance	± 5%

\*STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C  
\*NOCT: Nominal operating cell temperature (the data is only for reference)

Specifications	SLP080-12M
Cells	Polycrystalline silicon solar cell
No. of cells and connections	36(2X18)
Module dimension	1475mm[58.07in.]x342mm[13.46in.]x40mm[1.57in.]
Weight	6.68kg[14.73lbs]
Packing information(Carton)	1520mm[59.84in.]x390mm[15.35in.]x115mm[4.53in.]/(2pcs/ctn)




Junction Box  
Top View (Lid Open)



Section A-A

Characteristics

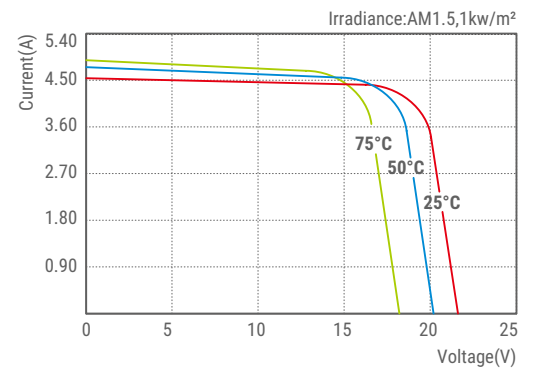

SLP080-12M I-V Curves